


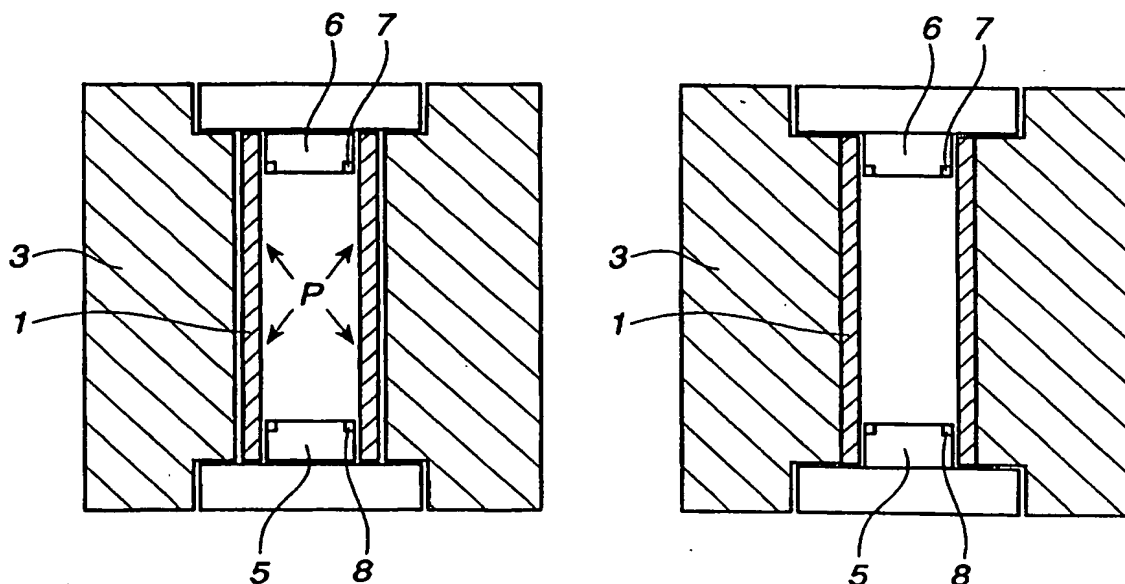

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>B01J 3/06 // A23L 3/015, B22F 3/15</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/64144</b> <b>(43) International Publication Date:</b> 16 December 1999 (16.12.99)
<b>(21) International Application Number:</b> PCT/SE99/00963 <b>(22) International Filing Date:</b> 4 June 1999 (04.06.99) <b>(30) Priority Data:</b> 9802069-6      9 June 1998 (09.06.98)      SE <b>(71) Applicant (for all designated States except US):</b> ABB AB [SE/SE]; S-721 83 Västerås (SE). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> LÖNNEBORG, Nils-Gunnar [SE/SE]; Barometergatan 15, S-723 50 Västerås (SE). <b>(74) Agent:</b> ABB AB; Patent, S-721 78 Västerås (SE).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

**(54) Title:** DEVICE AND METHOD FOR A HIGH PRESSURE PRESS**(57) Abstract**

A method to provide a high pressure press with a replaceable wear liner (1). The wear liner (1) is first inserted into the cylindrical pressure chamber (2) of the press and the pre-stressed by the application of an excess pressure above the yield point. The excess pressure is sufficient to increase the diameter of the wear liner and produce a residual radial compressive stress that holds the wear liner in place. When the wear liner is removed from the press it is dismantled. The advantage of the invention is that the replaceable wear liner, and a high pressure press comprising it, may be relatively inexpensive to produce and the replaceable wear liner may be quickly and simply replaced.

THIS PAGE BLANK (USPTO)

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PC..

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

JC01 Rec'd PCT/PTO 07 DEC 2000

Device and method for a high pressure press

5

## TECHNICAL AREA

The present invention relates to a device and method used in conjunction with high pressure presses in the areas of isostatic pressing and the high pressure treatment of substances. The present invention relates to a type of wear liner for use in high pressure presses and a method for fitting and replacing the wear liner.

## 15 BACKGROUND ART

For some time now high pressure treatment has been used as a method for inactivating micro-organisms and certain enzymes in foodstuffs and other provisions. A decisive factor for obtaining a good result from a high pressure treatment is that the pressure is sufficiently high. During treatment of provisions, the pressure is usually set at a pressure between 1,000 - 15,000 bar. Inside these presses that high working pressure is generated inside the innermost cylinder, the pressure chamber, also described as an inner liner. At such high pressures, the inner liner is subjected to very great fatigue stress. Liner failure unavoidably arises after some time in operation and so the inner liner is usually designed and made as a wear liner which is replaceable. To avoid liner failure, the wear liner is regularly replaced well in advance of the estimated service life. Such liners are expensive and consequently economically disadvantageous. Further, each wear liner replacement constitutes a time consuming and costly process. PCT/SE95/000153 describes a particular type of wear liner which is installed in a high pressure press of the pre-stressed wire-wound type.

Wear liners have to be replaced due to wear or fracture. The replacement operation includes a removal stage in which the wear liner is removed and an insertion stage in which a new wear liner is put in place. To remove a worn wear liner with, for example, a wire-wound press of the type described in PCT/SE95/000153 the piston part of the inner pressure intensifier of the press is arranged with specially adapted tools so that pressure can be brought to bear on the liner holder and the wear liner. Pressure from the inner pressure intensifier is applied to the liner holder and the wear liner and they are driven out of the cylindrical pressure chamber together under pressure. A new wear liner is placed in position inside a liner holder and driven into place inside the cylindrical pressure chamber of the press by the internal pressure intensifier which is combined with special tools. In the wire-wound press described in PCT/SE95/000153 both the interior of the cylindrical pressure chamber and the exterior of the liner holder are slightly conical in their cylindrical shape, shown schematically as prior art in Figure 1. The interior of the liner holder is cylindrical in shape. The wear liner is placed in the liner holder as a shrink fit. When the liner holder with the wear liner placed inside it is driven into the cylindrical pressure chamber of the press they become compressed and thereby pre-stressed in the radial direction in order to withstand high pressures under use.

As stated above, liner failure can arise after some time in operation. A feature of the wear liner described in PCT/SE95/000153 is that it is a very thin walled cylinder. This is designed such that in the event of a liner fracture, the additional force that might overload the press frame, which force is proportional to the cross section of the wear liner, is small. This means that the additional force due to the fracture can be safely confined within the press avoiding

expensive or dangerous damage to the press or its surroundings.

A further feature of the wear liner described in PCT/SE95/000153 is that it has a means on the outside of the wear liner, for example a spiral groove cut along the whole length of the outside surface of the wear liner. Thus if a wear liner should crack or split in service, then pressurised medium from the high pressure chamber leaks out of the wear liner. The pressurised medium that has leaked is conducted to the outside of the press via a groove or other means in the outer envelope surface of the wear liner. This indicates that a crack or split in the wear liner has occurred and that appropriate action must be taken and the wear liner replaced.

A disadvantage with the wear liner described in PCT/SE95/000153 is that it has to be mounted inside a wear liner holder, a cylinder with a conical exterior, which is expensive to manufacture. Its use is limited to presses with an internal pressure intensifier or a piston similarly capable of driving the wear liner in and out of the press. It is a lengthy and difficult process to remove the wear liner, as the wear liner and the liner holder have to be driven out of the press by the internal pressure intensifier combined together with special tools. The wear liner with the liner holder is also lengthy and difficult to install, as it has to be carefully driven into the press using the internal pressure intensifier together with special tools in order to position the conical liner holder, with the wear liner inside it, inside the cylindrical pressure chamber in a pre-stressed condition.

In addition to the wire-wound pre-stressed press of the type described in PCT/SE95/000153 there are alternate designs for high pressure presses. High pressure presses may or may not

have cylindrical pressure chambers that are pre-stressed. For example a sufficiently thick steel cylinder may be used as the cylindrical pressure chamber of a high pressure press without pre-stressing. However, this type of press requires frequent safety inspections for signs of damage when operated at higher pressures. Damage to such thick, heavy cylindrical pressure chambers entail expensive repairs or replacements.

#### DESCRIPTION OF THE INVENTION

10

It is an object of the invention to provide a high pressure press with a wear liner that is arranged in a state of residual radial compressive stress. It is a further object of the invention to provide a wear liner for a high pressure press that is easy to replace and is less expensive to manufacture. It is a still further object of the invention to manufacture a high pressure press that comprises a wear liner that may be easily removed.

20

These and other objects are achieved according to the invention by a replaceable wear liner with a slightly undersize outside diameter when compared to the inside diameter of a cylindrical pressure chamber. It is inserted into the cylindrical pressure chamber of a press without driving it in under the application of pressure. Once in position inside the cylindrical pressure chamber, it is fixed in place by expanding it radially under excess pressure. The wear liner is shaped as a thin walled circular cylinder which may be easily removed using a method described in the claims and below.

30

The wear liner is inserted into the cylindrical pressure chamber of the press. Once placed inside the cylindrical pressure chamber of a press the wear liner is fixed in place by the application of radial pressure to the inside of the

35

wear liner. This is carried out by closing the press and applying a pre-calculated excess radial pressure to the wear liner inside the press. This plastically deforms the wear liner leaving it with a residual compressive stress that acts  
5 as a radial pre-stress to withstand the high pressures generated in use.

To remove the wear liner according to the present invention the press is opened so that the wear liner may be accessed. A  
10 milling cutter or other tool is introduced inside the wear liner and used to make a series of longitudinal cuts inside the wear liner. The cuts are made to a pre-determined depth, running the whole length of the wear liner, deep in the wear liner material but without penetrating through the wear liner  
15 material and damaging the liner holder or innermost cylinder. The specially adapted milling cutter makes a cut which is approximately square in cross section. Although the cuts are preferably square in cross section it is within the scope of the invention to make cuts of a different cross-section.

20 Sufficient material is removed from the wear liner by the approximately square cuts that the remaining thin layer of wear liner material at the bottom of the cut is sufficiently wide that it acts as a kind of hinge. The thin layer or hinge  
25 buckles under the radial pre-stress compressive force remaining in the wear liner allowing the walls of the wear liner to collapse together.

When the cuts have been completed and the wear liner has  
30 collapsed inwards into the cuts it can then be removed easily from the liner holder or cylindrical pressure chamber without the use of pressure. After the old wear liner has been dismantled and removed a new wear liner can be put in place quickly and easily.

35

An economical high pressure press can comprise of a wear liner according to the invention. The press can have a relatively simple design as shown schematically in Figure 3. The cylindrical pressure chamber 3 may be manufactured as a cylinder from a single piece of solid steel. The cylindrical pressure chamber may alternatively be specially treated using, for example, an autofrettage process to provide a harder, stronger and radially pre-stressed region in the inner part of the cylinder. In such a one-piece cylinder design the wear liner may fit directly inside the cylindrical pressure chamber without any intermediate cylinder or wear liner holder.

A high pressure press comprising a replaceable wear liner according to the invention may be used for the treatment of substances, as in PCT/SE95/000153. Such a press may also be used for the isostatic pressing of powder pre-forms, to compact objects produced from powder or sintered forms. Such a press may also advantageously be used for consolidation of castings. Many castings contain internal cracks or other flaws following the casting process. Isostatic pressure treatment in such a press may be used to close up internal flaws thus consolidating the material of castings.

The advantages of this invention are many. The complete operation of changing the wear liner takes very little time and so may be planned with the minimum disruption to production requirements. The invention can be inserted, removed, and replaced in high pressure presses without the application of pressure to drive it in or out. The invention does not require an internal pressure intensifier or other piston with or without special tools to drive it in or drive it out of the press. This is simpler, quicker and removes the risk of accidental damage due to the inaccurate or wrong application of pressure by mistake. The invention is less expensive to manufacture in the embodiment of a regular



circular cylindrical form, compared to the cost of making pressure cylinders with conical bores and wear liner holders with conical outer diameters.

5 The invention can be incorporated in other types of high pressure presses, in addition to the type of press described in PCT/SE95/000153. The present invention may be used in high pressure presses designed with or without pre-stressed cylindrical pressure chambers, presses with or without an  
10 internal pressure intensifier, and presses with wire-wound cylindrical pressure chambers or presses with solid cylindrical pressure chambers. Because the present invention is so widely applicable it is expected to be manufactured in relatively greater numbers with the implicit cost reduction  
15 that that involves.

The present invention enables high pressure presses to be operated at a higher pressure within their respective design pressure. The use of a wear liner with the features disclosed  
20 in PCT/SE95/000153 means that close safety inspections of a pressure cylinder are not required so frequently since the wear liner is both easily changed and also indicates when damage or wear has taken place, as also described below.

## 25 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be described in more detail in connection with the enclosed drawings.

30 Figure 1 shows the prior art schematically with a wear liner and a wear liner holder of a high pressure press.

Figure 2 shows schematically a wear liner according to the invention being inserted into the cylindrical pressure chamber  
35 of a high pressure press.

Figure 3 shows a wear liner according to the invention being expanded and radially pre-stressed inside the cylindrical pressure chamber of a high pressure press.

- 5 Figure 4 shows a wear liner according to the invention in position in the cylindrical pressure chamber of a high pressure press.

- 10 Figure 5 shows cuts being made inside a wear liner according to the present invention prior to removing it from a high pressure press.

- Figure 6 shows a dismantled wear liner according to the present invention being removed from a high pressure press.

15

#### DESCRIPTION OF EMBODIMENTS

- A replaceable wear liner according to the present invention is shaped as thin-walled circular cylinder, although other  
20 cylindrical shapes are within the scope of the invention. The outside diameter of a wear liner according to the present invention is slightly undersize compared to the inside diameter of the a cylindrical pressure chamber or liner holder of a high pressure press.

25

- The wear liner 1 shown in Figure 2 is inserted in the cylindrical pressure chamber 2. Once placed inside the cylindrical pressure chamber 2 the wear liner is fixed in place by the application of an excess radial pressure. This is  
30 carried out by closing the press and applying a pre-calculated excess pressure to the wear liner inside the press, as shown schematically by letter "P" in Figure 3. This plastically deforms the wear liner leaving it with a residual compressive stress that acts as a radial pre-stress against the high  
35 pressures generated in use inside the press.

The wear liner 1 is put in place inside the cylindrical pressure chamber 2 inside the press. Two end caps 5, 6 are placed in position at either end of the wear liner. The end caps 5, 6 are each equipped with a temporary sealing means in the form of temporary undersize end cap seals 7, 8 which fit inside the ends of the wear liner 1. The inside diameter of the wear liner is undersize when first fitted, which means that the end cap seals 7, 8 have to be of a slightly smaller diameter than seals for normal service. When the end caps 5, 6 have been positioned, pressure may be applied inside the wear liner, by means of fluid under pressure supplied by an external pressure source delivered by means such as a pipe (not shown) arranged to pass through an end cap 5, 6.

Under sufficient excess pressure, above the yield point of the material, the wear liner is deformed and permanently expanded to a pre-calculated degree. The pressure is released. The end caps 5, 6 are removed. The end parts of the wear liner that were adjacent to the end caps and which were not under pressure may have a smaller inside diameter than the main part of the wear liner which was exposed to pressure. When necessary, the inner surface of the undeformed regions of the wear liner adjacent to the end caps may be machined to increase the inside diameter so that it is the same as the rest of the wear liner. The machining can be done before or after the expansion of the wear liner.

A wear liner according to the invention may be removed, either because of a crack or a fracture failure or as part of a planned maintenance operation, as follows.

One or both end caps 5, 6 with seals 7, 8 of the high pressure press are removed, depending on the type of press. A milling cutter 9 or other type of cutting, milling or grinding tool is

arranged to be lowered into the wear liner 1 as shown in Figure 5.

The milling cutter 9 is operated so as to make a series of  
5 longitudinal cuts 10 running the whole length of the liner.  
Usually four cuts distributed approximately evenly around the  
circumference provide sufficient effect. Fewer or more cuts  
may be used depending on the diameter of the wear liner. The  
cuts are made to a pre-determined depth, as deep as possible  
10 in the wear liner material, leaving a thickness of between  
1-10% and preferably between 1-5% of the diameter of the wear  
liner diameter in place.

After the cuts have been made and the specially adapted  
15 milling cutter removed the collapsed wear liner 11 can then be  
removed quite easily from the cylindrical pressure chamber 2  
and lifted clear with a standard lifting apparatus as shown in  
Figure 6. After the old wear liner has been dismantled and  
removed a new wear liner can be quickly and easily put in  
20 place as described above.

## CLAIMS

1. A method to provide a high pressure press comprising a cylindrical pressure chamber (2) and a replaceable wear liner (1), **characterised** by the steps of
  - inserting said wear liner (1) into said cylindrical pressure chamber (2)
  - fixing said wear liner (1) in place with expansion by inner pressure above the yield point, such that said wear liner (1) is thereby arranged in a state of residual compressive stress by the increase in diameter of said wear liner (1).
2. A method according to claim 1, **characterised** in that the method further comprises the step of removing an existing wear liner (1) which replacement includes the steps of
  - making one or more cuts in the inner surface of the existing said wear liner (1) with the intention of causing the existing said wear liner (1) to collapse under the residual compressive stress,
  - removing the collapsed existing said wear liner (1).
3. A method according to claim 2, **characterised** in that the one or more cuts (10) which are made in the inner surface of said existing said wear liner (1) are approximately square in cross section.
4. A high pressure press comprising a cylindrical pressure chamber (2) and a replaceable wear liner (1) arranged inside the cylindrical pressure chamber (2) in a state of residual compressive stress, **characterised** in that the exterior surface of said wear liner (1) is in direct contact with the interior surface of said cylindrical pressure chamber (2).
5. The use of a high pressure press according to claim 4 for the treatment of substances.

6. The use of a high pressure press according to claim 4 for the isostatic pressing of powder pre-form products.

5 7. The use of a high pressure press according to claim 4 for the isostatic pressing of castings.

Fig. 1

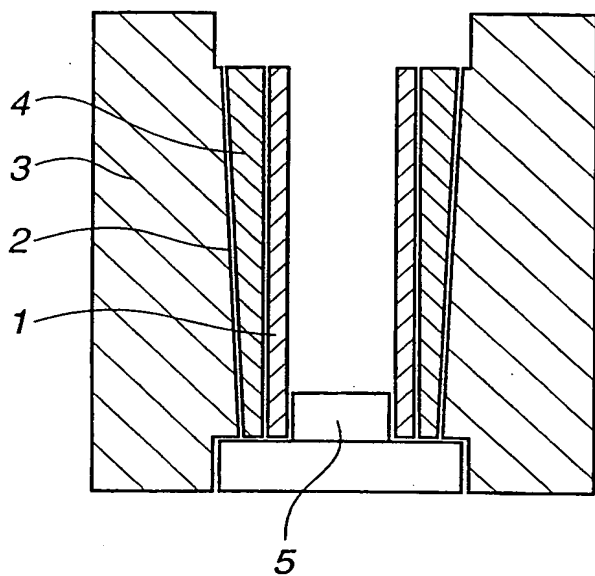


Fig. 2

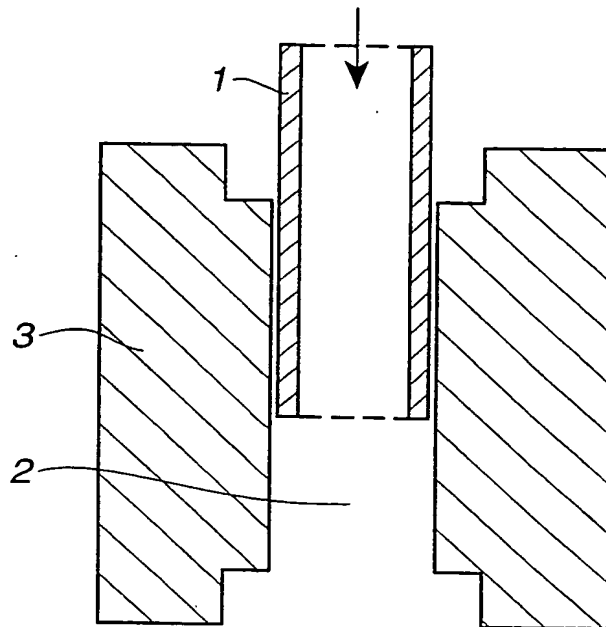


Fig. 3


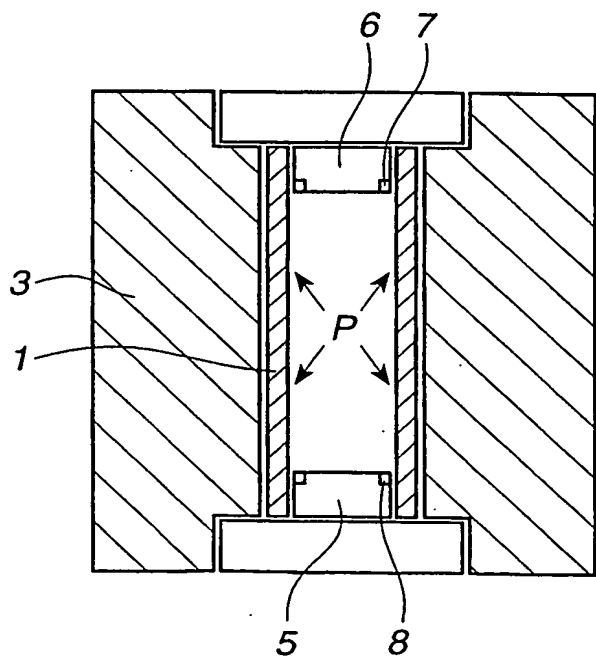


Fig. 4

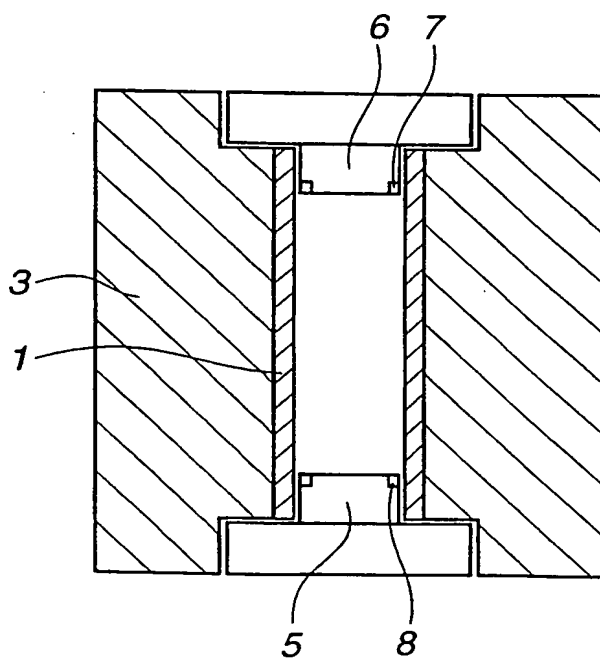

JCO1 Rec'd PCT/PTO 07 DEC 2000

**THIS PAGE BLANK (USPTO)**



Fig. 5


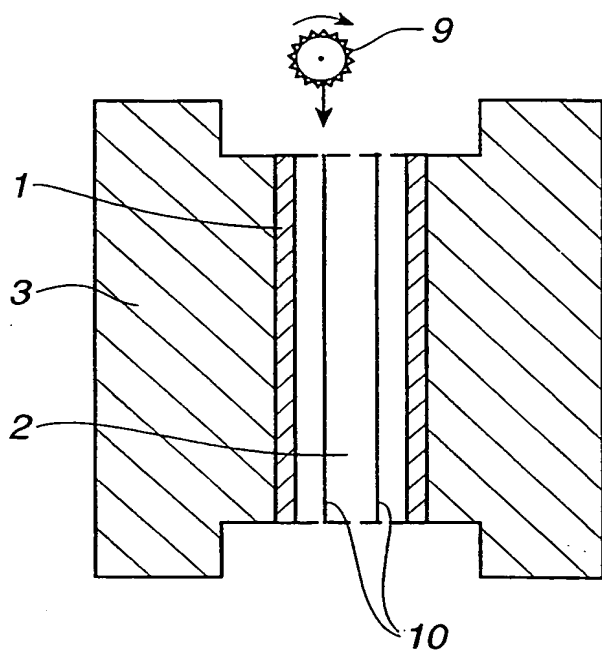


Fig. 6

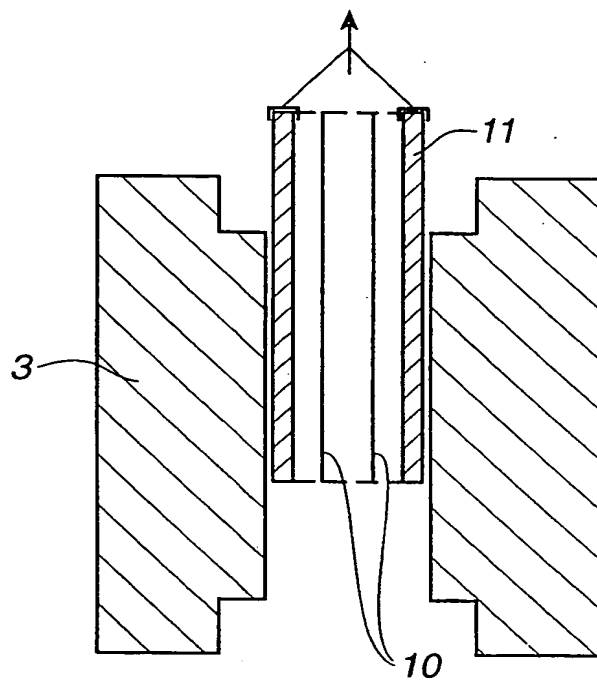

**THIS PAGE BLANK (USPTO)**

REPLACED BY  
APT 34 AMDT

## CLAIMS

1. A method to provide a high pressure press comprising a cylindrical pressure chamber (2) and a replaceable wear liner (1), **characterised** by the steps of
- 5 -inserting said wear liner (1) into said cylindrical pressure chamber (2)
- fixing said wear liner (1) in place with expansion by inner pressure above the yield point, such that said wear liner (1)
- 10 is thereby arranged in a state of residual compressive stress by the increase in diameter of said wear liner (1).
2. A method according to claim 1, **characterised** in that the method further comprises the step of removing an existing wear
- 15 liner (1) which replacement includes the steps of
- making one or more cuts in the inner surface of the existing said wear liner (1) with the intention of causing the existing said wear liner (1) to collapse under the residual compressive stress,
- 20 -removing the collapsed existing said wear liner (1).
3. A method according to claim 2, **characterised** in that the one or more cuts (10) which are made in the inner surface of said existing said wear liner (1) are approximately square in
- 25 cross section.
4. A high pressure press comprising a cylindrical pressure chamber (2) and a replaceable wear liner (1) arranged inside the cylindrical pressure chamber (2) in a state of residual
- 30 compressive stress, **characterised** in that the exterior surface of said wear liner (1) is in direct contact with the interior surface of said cylindrical pressure chamber (2).
5. The use of a high pressure press according to claim 4 for
- 35 the treatment of substances.

**THIS PAGE BLANK (USPTO)**

6. The use of a high pressure press according to claim 4 for the isostatic pressing of powder pre-form products.

5 7. The use of a high pressure press according to claim 4 for the isostatic pressing of castings.

**THIS PAGE BLANK (USPTO)**

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/00963

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B01J 3/06 // A23L 3/015, B22F 3/15

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B30B, B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 9521690 A1 (ASEA BROWN BOVERI AB), 17 August 1995 (17.08.95), page 7, line 10 - line 16, figures 1-2,4, claims 1,6 --	1,4-7
Y	EP 0013927 A1 (INTERATOM INTERNATIONALE ATOMREAKTORBAU GMBH), 6 August 1980 (06.08.80), page 8, line 4 - line 12, claim 1, page 1, 1st paragraph --	1,4-7
A	WO 9421370 A1 (ASEA BROWN BOVERI AB), 29 Sept 1994 (29.09.94), figures 2-3 --	1-7

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

5 October 1999

Date of mailing of the international search report

08 -10- 1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Mårten Hulthén/ELY

Telephone No. +46 8 782 25 00

**THIS PAGE BLANK (USPTO)**



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/00963

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4328959 A (GERWIN HOLTMANN), 11 May 1982 (11.05.82), figures 1,4, abstract --	2-3
A	US 5287621 A (MASAYOSHI USUI), 22 February 1994 (22.02.94) -- -----	1,4

**THIS PAGE BLANK (USPTO)**

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

30/08/99

International application No.

PCT/SE 99/00963

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
WO	9521690	A1	17/08/95	AU 692844 B	18/06/98
				AU 1828895 A	29/08/95
				AU 6939994 A	20/12/94
				BR 9506776 A	14/10/97
				DE 69413536 D,T	08/04/99
				EP 0702737 A,B	27/03/96
				EP 0744993 A	04/12/96
				FI 955719 A	12/01/96
				JP 9509099 T	16/09/97
				NO 954821 A	24/01/96
				SE 9400498 A	15/08/95
				US 5765465 A	16/06/98
EP	0013927	A1	06/08/80	SE 0013927 T3	
				AT 3143 T	15/05/83
WO	9421370	A1	29/09/94	AT 170421 T	15/09/98
				AU 678564 B	05/06/97
				AU 5437594 A	24/05/94
				AU 6388294 A	11/10/94
				BR 9406088 A	13/02/96
				DE 69313656 D,T	26/02/98
				DE 69413016 D	00/00/00
				EP 0666822 A,B	16/08/95
				SE 0666822 T3	
				EP 0690746 A,B	10/01/96
				FI 952086 A	21/06/95
				GR 3025416 T	27/02/98
				NO 951690 A	26/06/95
				SE 501052 C	31/10/94
				SE 9300915 A	20/09/94
				US 5622105 A	22/04/97
				US 5690943 A	25/11/97
US	4328959	A	11/05/82	NONE	
US	5287621	A	22/02/94	JP 5220513 A	31/08/93

**THIS PAGE BLANK (USPTO)**